


HCM SERIES Hose to Hose Connector



CARBON STEEL				
PART NUMBER	THREAD G1	THREAD G2	L	SW
HCM1620C	M16 X 2	M16 X 2	1.65	0.67

THM SERIES M16 x 2 Test Hoses

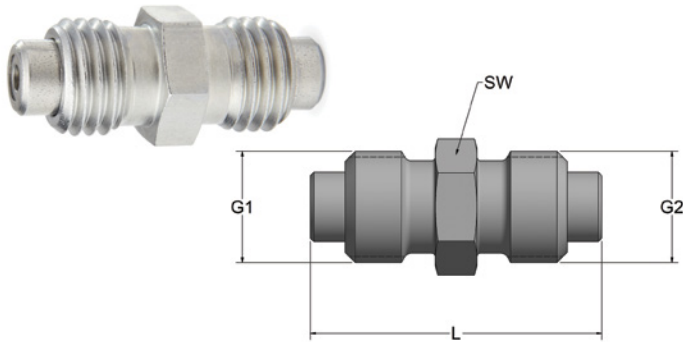

Maximum Working Pressure:
Up to 9000 PSI

Pressure/Temperature Factor:
100% at 20°C
95% at 40°C
90% at 60°C
80% at 80°C
70% at 100°C

CARBON STEEL, ZINC NICKEL PLATED				
PART NUMBER	MATERIAL	L (INCHES)	THREAD G1	THREAD G2
THM1620C-8	ZINC NICKEL PLATED C/S	8	M16 X 2	M16 X 2
THM1620C-12	ZINC NICKEL PLATED C/S	12	M16 X 2	M16 X 2
THM1620C-16	ZINC NICKEL PLATED C/S	16	M16 X 2	M16 X 2
THM1620C-25	ZINC NICKEL PLATED C/S	25	M16 X 2	M16 X 2
THM1620C-31	ZINC NICKEL PLATED C/S	31	M16 X 2	M16 X 2
THM1620C-39	ZINC NICKEL PLATED C/S	39	M16 X 2	M16 X 2

STAINLESS STEEL				
PART NUMBER	MATERIAL	L (INCHES)	THREAD G1	THREAD G2
THM1620S-16	S/S	16	M16 X 2	M16 X 2
THM1620S-31	S/S	31	M16 X 2	M16 X 2

Additional hose lengths and connection types available upon request.

Test Point Kit TPK-1001



Includes:

- (1) ¼" NPT, 3000 PSI pressure gauge
- (1) ¼" NPT, 10000 PSI pressure gauge
- (1) 79" test hose
- (1) 12" test hose
- (1) M16 X M16 hose to hose adapter
- (1) ¼" NPT Direct Pressure Gauge Adapter
- (1) 7/16-20 UNF SAE thread Direct Pressure Gauge Adapter
- (2) ¼" NPT test point – TPPM1620CBN1/4
- (1) 7/16-20 UNF SAE test point – TPPM1620CBS#4
- (1) 9/16-18 UNF SAE test point – TPPM1620CBS#6

*Image not shown with all components listed.